

## AutoComp software from Caron Engineering now makes automatic tool offsetting and error-free tooling control on your CNC a reality...

### PartView Makes Dimension and Tool Offset Status Much More Intuitive

PartView is a new enhancement which enables the importing of a JPG image directly into AutoComp. You can then label the JPG image with each area of the part being measured for deviation. AutoComp's PartView allows the operator to more easily identify which area of the part is calling for automatic tool compensation.



### AutoComp Accepts Part Measurements from WiFi Gauging Devices


Wireless data entry allows the operator to measure and simultaneously transmit the data. AutoComp will then automatically compensate tool offsets without tedious manual data input. This feature expedites the data-entry process and virtually eliminates data-entry errors.



[www.caron-eng.com](http://www.caron-eng.com)

Caron Engineering, Inc. | 207.646.6071 | fax: 207.646.6983  
1931 Sanford Road, P.O. Box 1529, Wells, Maine 04090



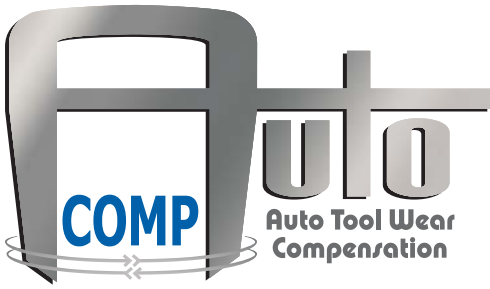

**AutoComp software will process your gauge data and update the tool offsets automatically, providing error-free tooling control...**

### Eliminates Operator Data-Entry Errors

Any gauging device can provide dimensional measurements and AutoComp calculates the necessary tooling adjustments. Parts may be measured on any type of gauging equipment such as CMMs, Digital Tooling, Gauges Fixture with LVDTs, Laser Micrometers, Vision Systems and Wireless Gauge Devices. Don't see your device... Caron Engineering can write drivers to retrieve data from nearly any type/brand of electronic measuring equipment.

### Statistically Controls Your Tool Offsets to Maintain Acceptable Tolerances of Your Machined Parts


AutoComp calculates tool compensation based upon tolerance limits and tool compensation limits using a running average.

### Reports a Tool Change Need to the Operator

When the tool has been compensated more than a user defined threshold, a wear-limit is issued, informing the operator that the tool needs to be changed. A signal can also be sent to the CNC control so that a redundant tool can be called automatically or the machine can be stopped before the next cycle.


### Compiles and Reports Historical Tool Wear Measurements

All measurement and compensation data is saved to a file. The data is date and time stamped for later analysis. The operator also receives real-time status of the useful life for each tool.

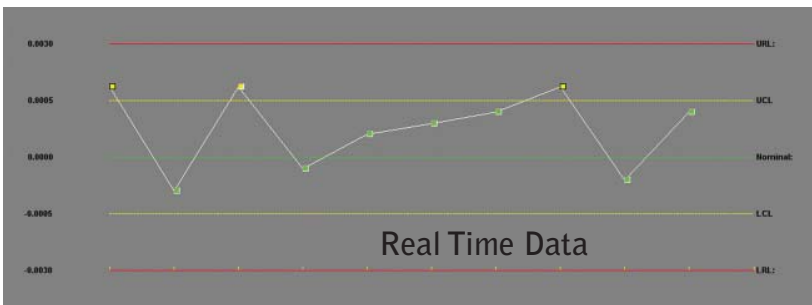

Name	Life	Active	Cpk	14	15	16	17	18	19	20	21	22	23
1: FIRST	7		1.91	.0003	.0005	-.0002	.0016	.0016	.0001	.0001	-.0002	.0014	.0001
2: SECOND	4		1.962	.0011*	-.0003	.0011	-.0001	.0002	.0003	.0004	.0011*	-.0002	.0004
3: THIRD	100		0.994	.0006	.0023*	.0003	.0031	.0031	.0012*	.0012	.0003	.0026	.0012*
4: FOURTH	0		1.543	.0001	.0002	.0005	.0003	.0003	-.0004	-.0004	.0005	.0007	-.0004
5: FIFTH	0		4.294	-.0004	-.0002	.0004	0.0	0.0	-.0006	-.0006	.0004	.0002	-.0006
6: SIXTH	3		1.283	-.0001	.0013	.0001	-.0002	-.0002	.0008	.0008	.0001	.0015*	.0008
7: SEVENTH	13		0.429	-.0017	-.0038	-.0042*	-.0015	-.001	-.0042	-.0025*	-.001	Missing	Missing
8: EIGHTH	10		0.475	-.0007	.0028	0.0	-.0004	-.0004	.002*	.002	0.0	.0007	.002*
9: NINETH	3		0.462	.0001	.0001	-.00015	.0015*	.0015	0.0	0.0	-.00015	.00016	0.0
10: TENTH	0		1.813	-.0001	-.0003	-.0001	.0004	.0004	-.0005	-.0005	-.0001	.0003	-.0005

Part Data

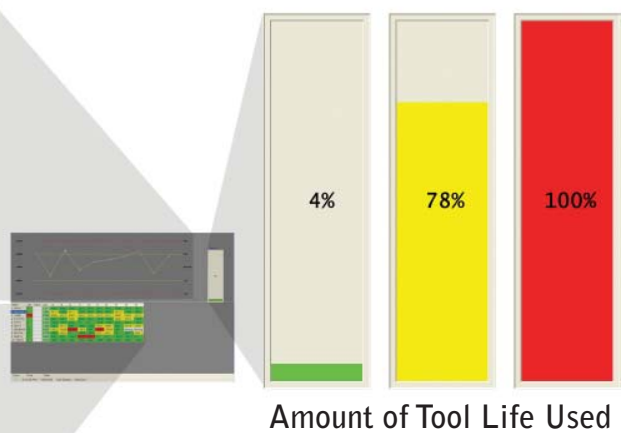

Amount of Tool Life Used

[www.caron-eng.com](http://www.caron-eng.com)

Caron Engineering, Inc. | 207.646.6071 | fax: 207.646.6983  
1931 Sanford Road, P.O. Box 1529, Wells, Maine 04090

